RELIABLE RUBBER PRODUCTS, INC.

2600 YOSEMITE BLVD. – SUITE B
MODESTO, CA 95354-4041
TOLL FREE 1-888-525-9750
PHONE 209-525-9750
FAX 209-521-7123
WEBSITE www.reliablerubber.com
E-MAIL sales@reliablerubber.com
office@reliablerubber.com


CATALOG

ESTABLISHED 1997


Reliable Rubber Products, Inc.

2600 Yosemite Blvd. – Suite B
Modesto, CA 95354-4041
Toll Free 1-888-525-9750
Phone 209-525-9750
Fax 209-521-7123
Website www.reliablerubber.com
Email sales@reliablerubber.com , office@reliablerubber.com


PROJECTION FROM DOCK (A)

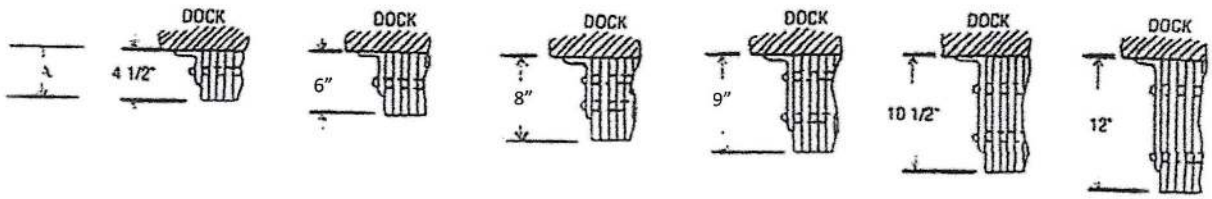


HORIZONTAL

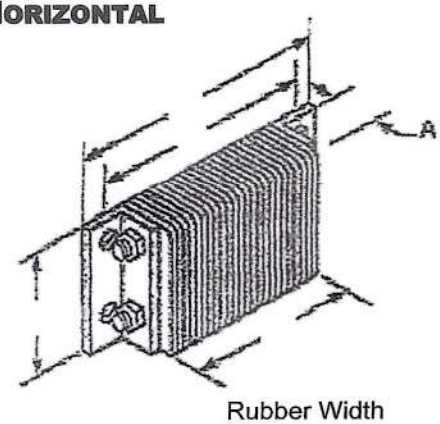


VERTICAL

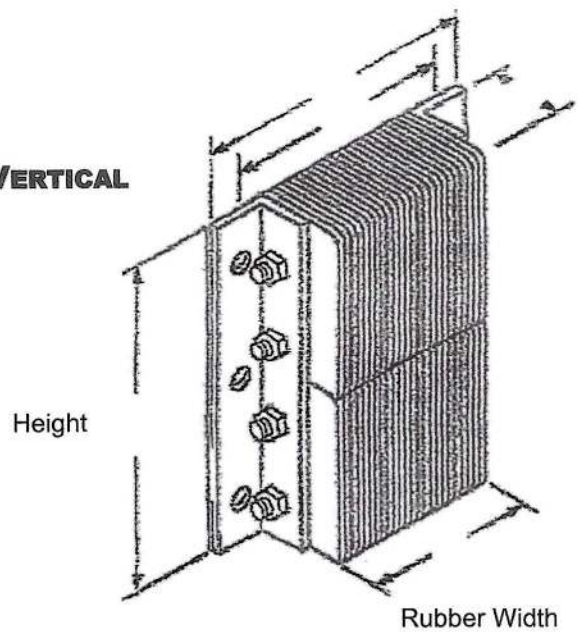




Standard = Two Angles



-1F = One Flat/One Angle




-2F = Two Flat Plates

LAMINATED DOCK BUMPERS


Reliable Rubber Products manufactures heavy duty laminated dock bumpers in a variety of horizontal and vertical models and sizes to provide maximum protection against vehicle damage to loading docks, dock levelers, buildings and cargo. Reliable Rubber Products dock bumpers are manufactured with 1/4" structural steel angles at each end; a 3/8" flat plate may be substituted for one or both angles, for use with dock levelers. Reliable Rubber Products also produces extra-long (up to 10'5") and extra-thick (up to 12") laminated dock bumpers to provide protection for unlimited applications. In addition, Reliable Rubber Products offers steel faced laminated bumpers for enhanced protection in areas where excessive friction from up-down trailer movement occurs.

HORIZONTAL

12" Tall

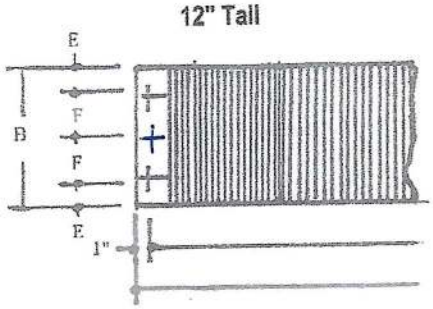


6" or 10" Tall

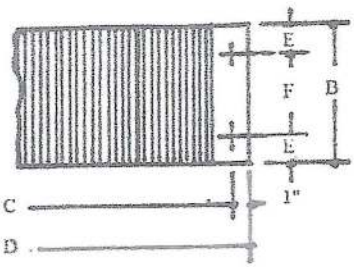


VERTICAL

20" Tall (24" & 36" Tall also available)

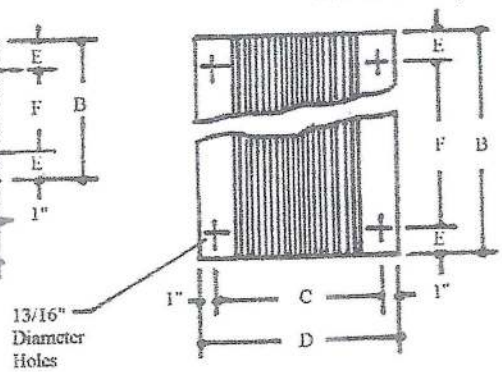

PROJECTION FROM DOCK (A)

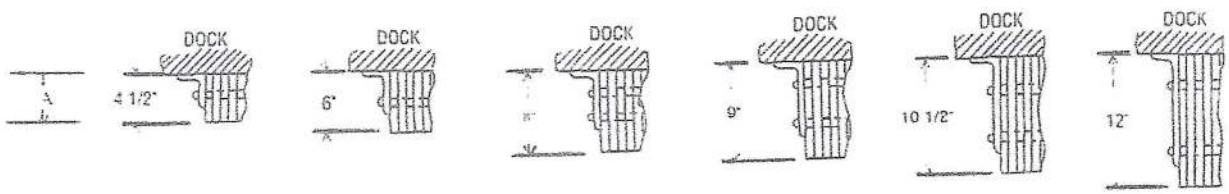

SPECIFICATIONS:


Furnish and install laminated dock bumpers, model no._____, as manufactured by **Reliable Rubber Products, Modesto, CA.** Laminated pads shall be rubberized fabric truck tires cut to uniform size pads and punched to receive 3/4" support rods. All bumpers must be a minimum of 4 1/2" thick and closed with two 1/4" structural steel angles under approximately 2,000 pounds of pressure. Rods shall be welded to angles at on end and closed with a nut at the other end. Anchor leg of angles shall extend a minimum of 2 1/2" beyond rubber surface at either end and contain 13/16" anchor holes as required. 3/8" thick flat plates may be substituted for one or both angles, for use with dock levelers. A "black" lead free enamel finish enhances a neat, professional architectural look. Galvanized (hot-dipped or cold spray) mounting angles are available by request. Anchor bolts are supplied separately.

LAMINATED DOCK BUMPERS

EXTRA-LENGTH


Reliable Rubber Products extra-length laminated dock bumpers provide continuous protection for truck, cargo, dock and shelter where it is important to contain the inside temperature elements. Seal and bumper interact to effectively seal the truck to the dock and prevent loss of refrigeration or warmth. Additional intermediate anchoring supports (4 options) are built in to accommodate various mounting conditions and to insure that product is securely fastened. Anchoring device # AD-3 will be supplied unless otherwise specified. Custom lengths available upon request.

AD-1




Anchorage to dock face

AD-2




Anchorage to dock floor

AD-3




Anchorage to dock floor & dock face

AD-4



Anchorage to curb angle & dock face

ANCHORING DEVICES FOR EXTRA-LONG LAMINATED DOCK BUMPERS

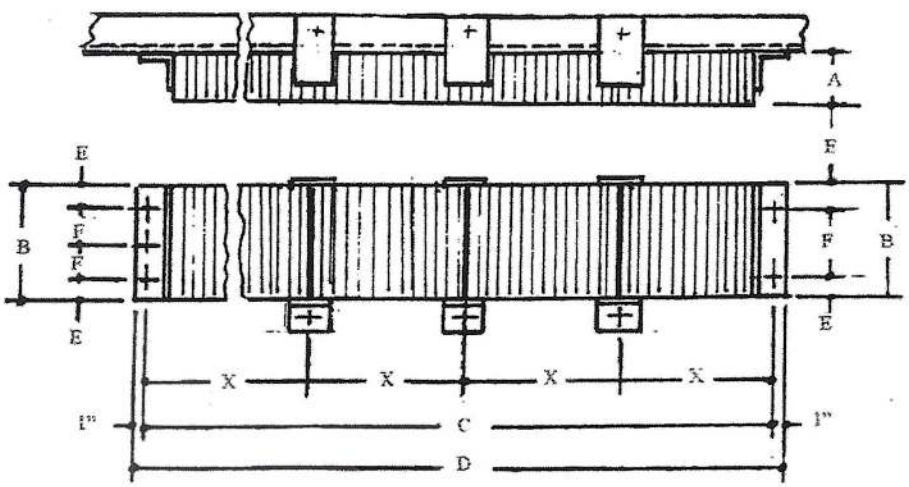

MODEL NUMBER	Rubber Dimensions Thick X Height X Width	"Hole-to-Hole" (Width)	"Over-all" (Width)	Weight (Pounds)
406 SERIES / HORIZONTAL	**(4 1/2" projection x 6" high)**			
406-12	4 1/2" X 6" X 8"	12"	14"	17 lbs.
406-14	4 1/2" X 6" X 10"	14"	16"	19 lbs.
406-16	4 1/2" X 6" X 12"	16"	18"	22 lbs.
406-18	4 1/2" X 6" X 14"	18"	20"	24 lbs.
406-24	4 1/2" X 6" X 20"	24"	26"	30 lbs.
406-36	4 1/2" X 6" X 32"	36"	38"	45 lbs.
406-53	4 1/2" X 6" X 49"	53"	55"	60 lbs.
406-65	4 1/2" X 6" X 61"	65"	67"	74 lbs.
406-77	4 1/2" X 6" X 73"	77"	79"	87 lbs.
406-89	4 1/2" X 6" X 85"	89"	91"	100 lbs.
406-101	4 1/2" X 6" X 97"	101"	103"	114 lbs.
406-113	4 1/2" X 6" X 109"	113"	115"	127 lbs.
406-125	4 1/2" X 6" X 121"	125"	127"	140 lbs.
410 SERIES / HORIZONTAL	**(4 1/2" projection x 10" high)**			
410-12	4 1/2" X 10" X 8"	12"	14"	25 lbs.
410-14	4 1/2" X 10" X 10"	14"	16"	29 lbs.
410-16	4 1/2" X 10" X 12"	16"	18"	33 lbs.
410-18	4 1/2" X 10" X 14"	18"	20"	36 lbs.
410-24	4 1/2" X 10" X 20"	24"	26"	48 lbs.
410-36	4 1/2" X 10" X 32"	36"	38"	70 lbs.
410-53	4 1/2" X 10" X 49"	53"	55"	103 lbs.
410-65	4 1/2" X 10" X 61"	65"	67"	126 lbs.
410-77	4 1/2" X 10" X 73"	77"	79"	149 lbs.
410-89	4 1/2" X 10" X 85"	89"	91"	172 lbs.
410-101	4 1/2" X 10" X 97"	101"	103"	195 lbs.
410-113	4 1/2" X 10" X 109"	113"	115"	220 lbs.
410-125	4 1/2" X 10" X 121"	125"	127"	240 lbs.
412 SERIES / HORIZONTAL	**(4 1/2" projection x 12" high)**			
412-12	4 1/2" X 12" X 8"	12"	14"	30 lbs.
412-13 *	4 1/2" X 12" X 9"	13"	15"	33 lbs.
412-14	4 1/2" X 12" X 10"	14"	16"	35 lbs.
412-16 *	4 1/2" X 12" X 12"	16"	18"	40 lbs.
412-18	4 1/2" X 12" X 14"	18"	20"	44 lbs.
412-24	4 1/2" X 12" X 20"	24"	26"	58 lbs.
412-36	4 1/2" X 12" X 32"	36"	38"	84 lbs.
412-53	4 1/2" X 12" X 49"	53"	55"	122 lbs.
412-65	4 1/2" X 12" X 61"	65"	67"	150 lbs.
412-77	4 1/2" X 12" X 73"	77"	79"	177 lbs.
412-89	4 1/2" X 12" X 85"	89"	91"	204 lbs.
412-101	4 1/2" X 12" X 97"	101"	103"	232 lbs.
412-113	4 1/2" X 12" X 109"	113"	115"	260 lbs.
412-125	4 1/2" X 12" X 121"	125"	127"	286 lbs.

NOTE: 3/8" Flat Plates may be substituted for one (-1F) or both angles (-2F) at "NO CHARGE".

*** ADD (-2F) TO PART# = LAMINATED "REPLACEMENT'S" FOR MOLDED E.O.D. BUMPERS.**


MODEL NUMBER	Rubber Dimensions Thick X Height X Width	"Hole-to-Hole" (Width)	"Over-all" (Width)	Weight (Pounds)
610 SERIES / HORIZONTAL	**(6" projection x 10" high)**			
610-12	6" X 10" X 8"	12"	14"	29 lbs.
610-14	6" X 10" X 10"	14"	16"	33 lbs.
610-16	6" X 10" X 12"	16"	18"	38 lbs.
610-18	6" X 10" X 14"	18"	20"	44 lbs.
610-24	6" X 10" X 20"	24"	26"	60 lbs.
610-36	6" X 10" X 32"	36"	38"	92 lbs.
610-53	6" X 10" X 49"	53"	55"	123 lbs.
610-65	6" X 10" X 61"	65"	67"	150 lbs.
610-77	6" X 10" X 73"	77"	79"	177 lbs.
610-89	6" X 10" X 85"	89"	91"	205 lbs.
610-101	6" X 10" X 97"	101"	103"	234 lbs.
610-113	6" X 10" X 109"	113"	115"	262 lbs.
610-125	6" X 10" X 121"	125"	127"	289 lbs.
612 SERIES / HORIZONTAL	**(6" projection x 12" high)**			
612-12	6" X 12" X 8"	12"	14"	34 lbs.
612-13 *	6" X 12" X 9"	13"	15"	37 lbs.
612-14	6" X 12" X 10"	14"	16"	39 lbs.
612-16 *	6" X 12" X 12"	16"	18"	45 lbs.
612-18	6" X 12" X 14"	18"	20"	53 lbs.
612-24	6" X 12" X 20"	24"	26"	71 lbs.
612-36	6" X 12" X 32"	36"	38"	104 lbs.
612-53	6" X 12" X 49"	53"	55"	135 lbs.
612-65	6" X 12" X 61"	65"	67"	165 lbs.
612-77	6" X 12" X 73"	77"	79"	195 lbs.
612-89	6" X 12" X 85"	89"	91"	225 lbs.
612-101	6" X 12" X 97"	101"	103"	255 lbs.
612-113	6" X 12" X 109"	113"	115"	285 lbs.
612-125	6" X 12" X 121"	125"	127"	315 lbs.
VERTICAL SERIES	**(4 1/2",6",8",9",10 1/2" & 12" projections)**			
VB420-11	4 1/2" X 20" X 7"	11"	13"	46 lbs.
VB420-12	4 1/2" X 20" X 8"	12"	14"	51 lbs.
VB420-14	4 1/2" X 20" X 10"	14"	16"	59 lbs.
VB424-11	4 1/2" X 24" X 7"	11"	13"	56 lbs.
VB424-12	4 1/2" X 24" X 8"	12"	14"	62 lbs.
VB424-14	4 1/2" X 24" X 10"	14"	16"	65 lbs.
VB436-11	4 1/2" X 36" X 7"	11"	13"	85 lbs.
VB436-12	4 1/2" X 36" X 8"	12"	14"	93 lbs.
VB436-14	4 1/2" X 36" X 10"	14"	16"	100 lbs.
VB620-11	6" X 20" X 7"	11"	13"	53 lbs.
VB620-12	6" X 20" X 8"	12"	14"	58 lbs.
VB620-14	6" X 20" X 10"	14"	16"	68 lbs.
VB624-11	6" X 24" X 7"	11"	13"	65 lbs.
VB624-12	6" X 24" X 8"	12"	14"	71 lbs.
VB624-14	6" X 24" X 10"	14"	16"	83 lbs.

MODEL NUMBER	Rubber Dimensions Thick X Height X Width	"Hole-to-Hole" (Width)	"Over-all" (Width)	Weight (Pounds)
VERTICAL SERIES (cont.)	**(6",8",9",10 1/2" & 12" projections)**			
VB636-11	6" X 36" X 7"	11"	13"	95 lbs.
VB636-12	6" X 36" X 8"	12"	14"	104 lbs.
VB636-14	6" X 36" X 10"	14"	16"	121 lbs.
VB820-11	8" X 20" X 7"	11"	13"	92 lbs.
VB820-12	8" X 20" X 8"	12"	14"	101 lbs.
VB820-14	8" X 20" X 10"	14"	16"	118 lbs.
VB824-11	8" X 24" X 7"	11"	13"	110 lbs.
VB824-12	8" X 24" X 8"	12"	14"	120 lbs.
VB824-14	8" X 24" X 10"	14"	16"	130 lbs.
VB836-11	8" X 36" X 7"	11"	13"	170 lbs.
VB836-12	8" X 36" X 8"	12"	14"	186 lbs.
VB836-14	8" X 36" X 10"	14"	16"	218 lbs.
VB920-11	9" X 20" X 7"	11"	13"	103 lbs.
VB920-12	9" X 20" X 8"	12"	14"	113 lbs.
VB920-14	9" X 20" X 10"	14"	16"	120 lbs.
VB924-11	9" X 24" X 7"	11"	13"	124 lbs.
VB924-12	9" X 24" X 8"	12"	14"	136 lbs.
VB924-14	9" X 24" X 10"	14"	16"	158 lbs.
VB936-11	9" X 36" X 7"	11"	13"	192 lbs.
VB936-12	9" X 36" X 8"	12"	14"	210 lbs.
VB936-14	9" X 36" X 10"	14"	16"	245 lbs.
VB1020-11	10 1/2" X 20" X 7"	11"	13"	112 lbs.
VB1020-12	10 1/2" X 20" X 8"	12"	14"	123 lbs.
VB1020-14	10 1/2" X 20" X 10"	14"	16"	130 lbs.
VB1024-11	10 1/2" X 24" X 7"	11"	13"	135 lbs.
VB1024-12	10 1/2" X 24" X 8"	12"	14"	148 lbs.
VB1024-14	10 1/2" X 24" X 10"	14"	16"	172 lbs.
VB1036-11	10 1/2" X 36" X 7"	11"	13"	203 lbs.
VB1036-12	10 1/2" X 36" X 8"	12"	14"	222 lbs.
VB1036-14	10 1/2" X 36" X 10"	14"	16"	259 lbs.
VB1220-11	12" X 20" X 7"	11"	13"	134 lbs.
VB1220-12	12" X 20" X 8"	12"	14"	147 lbs.
VB1220-14	12" X 20" X 10"	14"	16"	171 lbs.
VB1224-11	12" X 24" X 7"	11"	13"	161 lbs.
VB1224-12	12" X 24" X 8"	12"	14"	176 lbs.
VB1224-14	12" X 24" X 10"	14"	16"	205 lbs.

MODEL NUMBER	Rubber Dimensions Thick X Height X Width	"Hole-to-Hole" (Width)	"Over-all" (Width)	Weight (Pounds)
EXTRA-THICK / VERTICAL (cont.)	**(12" Projection)**			
VB1236-11	12" X 36" X 7"	11"	13"	242 lbs.
VB1236-12	12" X 36" X 8"	12"	14"	264 lbs.
VB1236-14	12" X 36" X 10"	14"	16"	308 lbs.
EXTRA-THICK / HORIZONTAL	**(8",9",10 1/2" & 12" Projection)**			
810-12	8" X 10" X 8"	12"	14"	48 lbs.
810-14	8" X 10" X 10"	14"	16"	56 lbs.
810-16	8" X 10" X 12"	16"	18"	64 lbs.
810-24	8" X 10" X 20"	24"	26"	88 lbs.
810-36	8" X 10" X 32"	36"	38"	127 lbs.
812-12	8" X 12" X 8"	12"	14"	58 lbs.
812-13 *	8" X 12" X 9"	13"	15"	63 lbs.
812-14	8" X 12" X 10"	14"	16"	68 lbs.
812-16 *	8" X 12" X 12"	16"	18"	77 lbs.
812-24	8" X 12" X 20"	24"	26"	106 lbs.
812-36	8" X 12" X 32"	36"	38"	153 lbs.
910-12	9" X 10" X 8"	12"	14"	54 lbs.
910-14	9" X 10" X 10"	14"	16"	63 lbs.
910-16	9" X 10" X 12"	16"	18"	72 lbs.
910-24	9" X 10" X 20"	24"	26"	98 lbs.
910-36	9" X 10" X 32"	36"	38"	142 lbs.
912-12	9" X 12" X 8"	12"	14"	65 lbs.
912-13 *	9" X 12" X 9"	13"	15"	71 lbs.
912-14	9" X 12" X 10"	14"	16"	76 lbs.
912-16 *	9" X 12" X 12"	16"	18"	87 lbs.
912-24	9" X 12" X 20"	24"	24"	118 lbs.
912-36	9" X 12" X 32"	36"	38"	171 lbs.
1010-12	10 1/2" X 10" X 8"	12"	14"	64 lbs.
1010-14	10 1/2" X 10" X 10"	14"	16"	74 lbs.
1010-16	10 1/2" X 10" X 12"	16"	18"	85 lbs.
1010-24	10 1/2" X 10" X 20"	24"	26"	109 lbs.
1010-36	10 1/2" X 10" X 32"	36"	38"	156 lbs.
1012-12	10 1/2" X 12" X 8"	12"	14"	77 lbs.
1012-13 *	10 1/2" X 12" X 9"	13"	15"	83 lbs.
1012-14	10 1/2" X 12" X 10"	14"	16"	89 lbs.
1012-16 *	10 1/2" X 12" X 12"	16"	18"	102 lbs.
1012-24	10 1/2" X 12" X 20"	24"	26"	131 lbs.
1012-36	10 1/2" X 12" X 32"	36"	38"	188 lbs.
1210-12	12" X 10" X 8"	12"	14"	70 lbs.
1210-14	12" X 10" X 10"	14"	16"	81 lbs.
1210-16	12" X 10" X 12"	16"	18"	93 lbs.
1210-24	12" X 10" X 20"	24"	26"	128 lbs.

LAMINATED DOCK BUMPERS

STEEL FACED

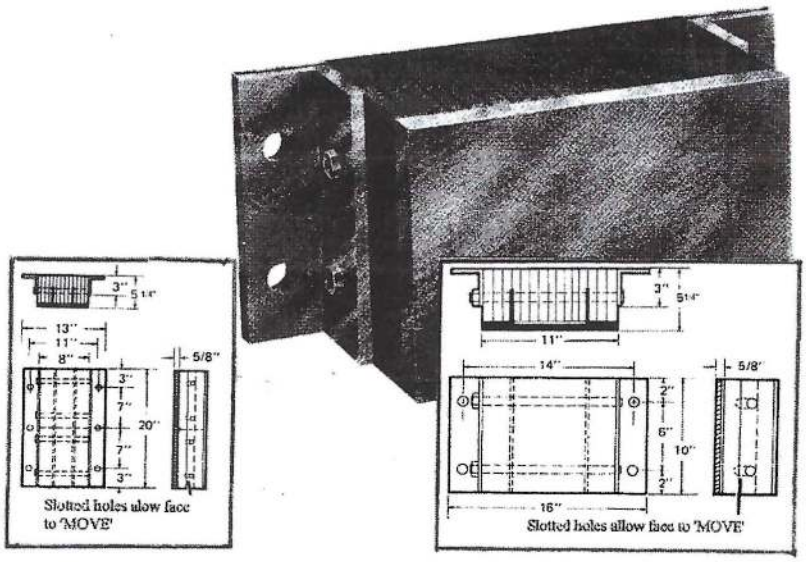


VERTICAL MODEL
#420-11SF SHOWN


HORIZONTAL MODEL
#410-14 SF SHOWN

Reliable Rubber Products steel faced bumpers are designed for use in loading dock areas where the up-down movement of self-leveling trailers produces excessive friction. Steel faced bumpers are also used in areas subject to heavy abuse due to repeated trailer impacts caused by tight backing constraints. Slotted holes in the interior mounting frame allow the steel face to move against and compress the laminated bumper when contact occurs. This heavy-duty bumper provides the most dock protection possible and produces an excellent deflection and shock absorbing effect.

HORIZONTAL

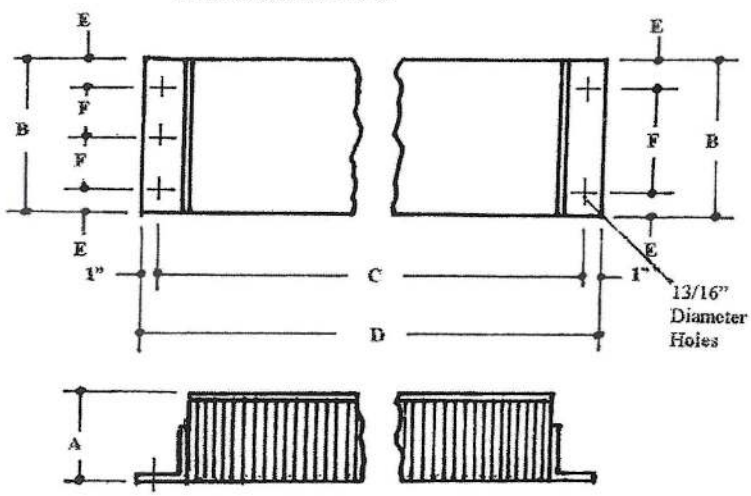

VERTICAL

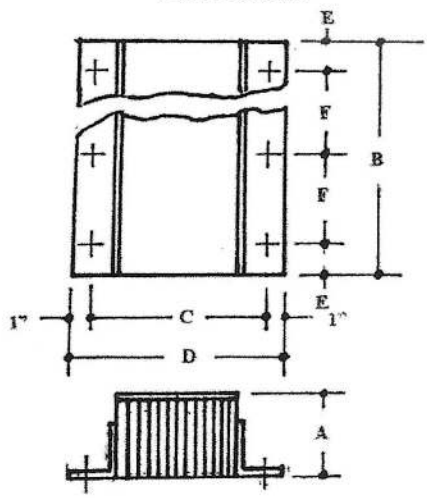

MODEL NUMBER	Rubber Dimensions Thick X Height X Width	"Hole-to-Hole" (Width)	"Over-all" (Width)	Weight (Pounds)
EXTRA-THICK / HORIZONTAL (cont.)	***(12" Projection)***			
1212-12	12" X 12" X 8"	12"	14"	84 lbs.
1212-13 *	12" X 12" X 9"	13"	15"	91 lbs.
1212-14	12" X 12" X 10"	14"	16"	98 lbs.
1212-16 *	12" X 12" X 12"	16"	18"	112 lbs.
1212-24	12" X 12" X 20"	24"	26"	154 lbs.
1212-36	12" X 12" X 32"	36"	38"	220 lbs.
STEEL-FACED DOCK BUMPERS / HORIZONTAL				****HEAVY-DUTY****
	****1st # is Overall Projection***			
312-13SF *	4" X 12" X 9" **(THIN)**	13"	15"	48 lbs.
312-16SF *	4" X 12" X 12" **(THIN)**	16"	18"	55 lbs.
406-12SF	5" X 6" X 8"	12"	14"	26 lbs.
406-14SF	5" X 6" X 10"	14"	16"	30 lbs.
406-16SF	5" X 6" X 12"	16"	18"	35 lbs.
406-18SF	5" X 6" X 14"	18"	20"	40 lbs.
406-24SF	5" X 6" X 20"	24"	26"	50 lbs.
406-36SF	5" X 6" X 32"	36"	38"	75 lbs.
410-12SF	5" X 10" X 8"	12"	14"	43 lbs.
410-14SF	5" X 10" X 10"	14"	16"	50 lbs.
410-16SF	5" X 10" X 12"	16"	18"	58 lbs.
410-18SF	5" X 10" X 14"	18"	20"	60 lbs.
410-24SF	5" X 10" X 20"	24"	26"	75 lbs.
410-36SF	5" X 10" X 32"	36"	38"	118 lbs.
412-12SF	5" X 12" X 8"	12"	14"	50 lbs.
412-13SF *	5" X 12" X 9"	13"	15"	54 lbs.
412-14SF	5" X 12" X 10"	14"	16"	58 lbs.
412-16SF *	5" X 12" X 12"	16"	18"	66 lbs.
412-18SF	5" X 12" X 14"	18"	20"	72 lbs.
412-24SF	5" X 12" X 20"	24"	26"	90 lbs.
412-36SF	5" X 12" X 32"	36"	38"	145 lbs.
610-12SF	6 1/2" X 10" X 8"	12"	14"	47 lbs.
610-14SF	6 1/2" X 10" X 10"	14"	16"	55 lbs.
610-16SF	6 1/2" X 10" X 12"	16"	18"	63 lbs.
610-18SF	6 1/2" X 10" X 14"	18"	20"	65 lbs.
610-24SF	6 1/2" X 10" X 20"	24"	26"	85 lbs.
610-36SF	6 1/2" X 10" X 32"	36"	38"	130 lbs.
612-12SF	6 1/2" X 12" X 8"	12"	14"	53 lbs.
612-13SF *	6 1/2" X 12" X 9"	13"	15"	58 lbs.
612-14SF	6 1/2" X 12" X 10"	14"	16"	62 lbs.
612-16SF *	6 1/2" X 12" X 12"	16"	18"	71 lbs.
612-18SF	6 1/2" X 12" X 14"	18"	20"	78 lbs.
612-24SF	6 1/2" X 12" X 20"	24"	26"	105 lbs.
612-36SF	6 1/2" X 12" X 32"	36"	38"	165 lbs.

MODEL NUMBER	Rubber Dimensions Thick X Height X Width	"Hole-to-Hole" (Width)	"Over-all" (Width)	Weight (Pounds)
STEEL-FACED DOCK BUMPERS / VERTICAL				****HEAVY-DUTY****
	1st # is Overall Projection			
VB320-11SF	4" X 20" X 7" **(THIN**	11"	13"	65 lbs.
VB320-14SF	4" X 20" X 10" **(THIN**	14"	16"	83 lbs.
VB324-11SF	4" X 24" X 7" **(THIN**	11"	13"	78 lbs.
VB324-14SF	4" X 24" X 10" **(THIN**	14"	16"	100 lbs.
VB420-11SF	5" X 20" X 7"	11"	13"	75 lbs.
VB420-14SF	5" X 20" X 10"	14"	16"	96 lbs.
VB424-11SF	5" X 24" X 7"	11"	13"	90 lbs.
VB424-14SF	5" X 24" X 10"	14"	16"	108 lbs.
VB436-11SF	5" X 36" X 7"	11"	13"	155 lbs.
VB620-11SF	6 1/2" X 20" X 7"	11"	13"	83 lbs.
VB620-14SF	6 1/2" X 20" X 10"	14"	16"	106 lbs.
VB624-11SF	6 1/2" X 24" X 7"	11"	13"	100 lbs.
VB624-14SF	6 1/2" X 24" X 10"	14"	16"	128 lbs.
VB636-11SF	6 1/2" X 36" X 7"	11"	13"	160 lbs.
VB820-11SF	8 1/2" x 20" x 7"	11"	13"	125 lbs.
VB824-11SF	8 1/2" x 24" x 7"	11"	13"	162 lbs.
VB836-11SF	8 1/2" x 36" x 7"	11"	13"	243 lbs.
VB920-11SF	9 1/2" x 20" x 7"	11"	13"	152 lbs.
VB924-11SF	9 1/2" x 24" x 7"	11"	13"	183 lbs.
VB936-11SF	9 1/2" x 36" x 7"	11"	13"	274 lbs.
VB1020-11SF	11" X 20" X 7"	11"	13"	155 lbs.
VB1024-11SF	11" X 24" X 7"	11"	13"	214 lbs.
VB1036-11SF	11" X 36" X 7"	11"	13"	321 lbs.
VB1220-11SF	12 1/2" X 20" X 7"	11"	13"	150 lbs.
VB1224-11SF	12 1/2" X 24" X 7"	11"	13"	245 lbs.
VB1236-11SF	12 1/2" X 36" X 7"	11"	13"	368 lbs.


NOTE: 3/8" Flat Plates may be substituted for one (-1F) or both angles (-2F) at "NO CHARGE".

*** ADD (-2F) TO PART# = LAMINATED "REPLACEMENT'S" FOR MOLDED E.O.D. BUMPERS.**

MOLDED DOCK BUMPERS


For heavy-duty protection of trucks, docks and material handling vehicles. Contains the correct amount of resiliency to absorb pressure and impact shock without damage to truck or dock. Unique design and construction achieves high impact resistance and long life. Immune to all weather conditions and maintenance free.

MODEL T - 3




33 LBS. EACH
3" THICK

MODEL L - 4



26 LBS. EACH
4" THICK

MODEL B - 3, B - 4, B - 6

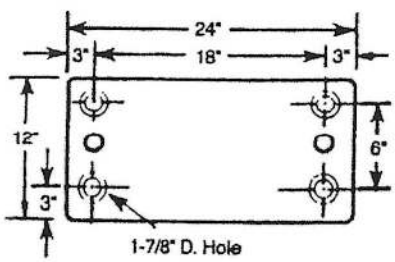

B3 - 28 LBS EA. 3" THICK
B4 - 36 LBS EA. 4" THICK
B6 - 55 LBS EA. 6" THICK


SPECIFICATIONS:

Molded in one piece of all new nylon and polyester reinforced rubber. Bumper to have durometer reading of 80 plus or minus 5.0; tensile strength of 950 - 1,050 PSI with an impact recovery (ASTM 1170) of 95%.

MOLDED DOCK BUMPERS


For heavy duty protection of trucks, docks and material handling vehicles. Contains the correct amount of resiliency to absorb pressure and impact shock without damage to truck or dock. Unique design and construction achieves high impact resistance and long life, immune to all weather conditions and maintenance free.

MODEL B - 12




22 LBS. EACH
4" THICK

MODEL B - 13




18 LBS. EACH
4" THICK

MODEL B - 18

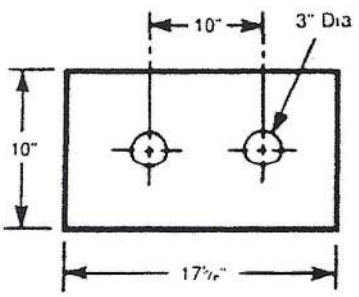

24 LBS. EACH
4" THICK

MODEL B - 22

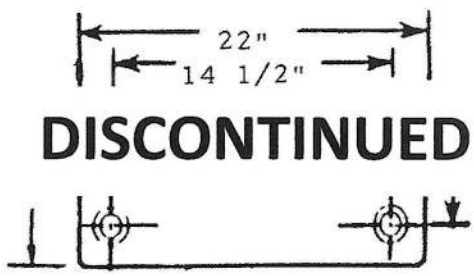

DISCONTINUED


31 LBS. EACH
4" THICK

SPECIFICATIONS:
Molded in one piece of all new nylon and polyester reinforced rubber. Bumper to have durometer reading of 80 plus or minus 5.0. Strength of 950 - 1,050 PSI with an impact recovery (ASTM) of 90.

EXTRUDED DOCK BUMPERS


For use in commercial loading docks, parking garages, marinas, heavy duty construction equipment, vehicles such as trucks and trailers, forklifts and other material handling equipment. Extruded dock bumpers offer long lasting protection in a variety of styles to meet your indoor or outdoor needs.

MODEL D - 2




Bolt size;5/16"x2 1/2"
1.4 lbs/ft.

MODEL D - 3




Bolt size;1/2"x 4" or 6"
3.5 lbs/ft.

MODEL D - 4

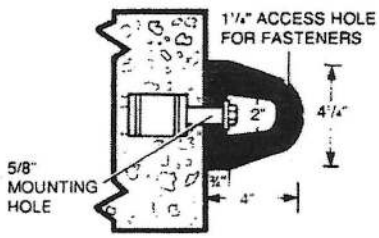


Bolt size;1/2"x 4" or 6"
5.5 lbs/ft.

MODEL D - 6

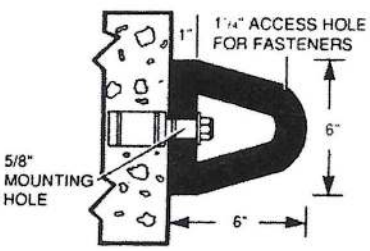


Bolt size;1/2"x 6"
8.5 lbs/ft.

MODEL U - 3



Bolt size;1/2"x 6"
7.8 lbs/ft.

MODEL U - 4



Bolt size;1/2"x6"
6.7 lbs/ft.

SPECIFICATIONS:

Bumpers are made of rubber with a durometer reading of 70 plus or minus 5.0. Tensile strength is 1,850 PSI with an elongation of 220%. The tear strength (ASTM 624) is 229 lbs./in. (103.87 KG/25.4 MM) with impact resistance (ASTM 2632) OF 75%.


COLORS: Black

LENGTHS: Up to 10'

EXTRUDED DOCK BUMPERS


For use in commercial loading docks, parking garages, marinas, heavy duty construction equipment, vehicles such as trucks and trailers, forklifts and other material handling equipment. Extruded dock bumpers offer long lasting protection in a variety of styles to meet your indoor or outdoor needs.

MODEL ER - 25



Bolt size; 1/2"x 6"
5.0 lbs/ft.

MODEL ER - 45




Bolt size; 1/2"x 6"
7.5 lbs/ft.

MODEL WT - 20




Bolt size; 1/2"x 4" or 6"
3.5 lbs/ft.

MODEL WT-25




Bolt size; 1/2"x 4" or 6"
3.0 lbs/ft.

MODEL E - 1




Bolt size; 3/8"x 3 3/4"
6.5lbs/ft.

MODEL M - 2



Bolt size; 1/2"x 4"
10 lbs/ft.

MODEL WT-30



Bolt size; 1/2"x 4" or 6"
5.0 lbs/ft.


SPECIFICATIONS:
Bumpers are made of rubber with a durometer reading of 70 plus or minus 5.0. Tensile strength is 1,8050 PSI with an elongation of 220%. The tear strength (ASTM 624) os 229; bs/om/ (103.87kg/25.4 MM) with impact resistance (ASTM 2632) of 75%.
COLOR: Black
LENGTHS: up to 10'

MOLDED RUBBER DOCK BUMPERS				
T-3	3" X 22" X 22"	(3) HOLES		33 lbs.
L-4	4" X 18" X 18"	(3) HOLES		32 lbs.
B-3	3" X 12" X 24"	(4) HOLES		28 lbs.
B-4	4" X 12" X 24"	(4) HOLES		36 lbs.
B-6	6" X 12" X 24"	(4) HOLES		72 lbs.
B-12	4" X 12" X 13"	*** for: (4) hole EOD**		22 lbs.
B-12SF "KIT"	***Steel-Face Plate & bolts (does not inc. bumper)***			17 lbs.
B-13	4" X 10" X 13"	*** for: (2) hole EOD**		18 lbs.
B-13SF "KIT"	***Steel-Face Plate & bolts (does not inc. bumper)***			12 lbs.
B-18	4" X 10" X 18"	(2) HOLES		24 lbs.
B-18SF "KIT"	***Steel-Face Plate & bolts (does not inc. bumper)***			18 lbs.
B-218	2" X 8" X 18"	(2) HOLES		16 lbs.
B-218SF "KIT"	***Steel-Face Plate & bolts (does not inc. bumper)***			18 lbs.
EXTRUDED RUBBER DOCK/WALL BUMPERS		**(NO HOLES, 10'0" lengths ONLY)**		
D-2	2" X 2" X 10'0"	NO HOLES		19 lbs.
D-3	3" X 3" X 10'0"	NO HOLES		35 lbs.
D-4	4" X 4" X 10'0"	NO HOLES		55 lbs.
D-6	6" X 6" X 10'0"	NO HOLES		85 lbs.
U-3	3 1/2" X 4 1/2" X 10'0"	NO HOLES		78 lbs.
U-4	3 7/8" X 3 3/8" X 10'0"	NO HOLES		67 lbs.
ER-25	2" X 5" X 10'0"	NO HOLES		50 lbs.
ER-45	3 1/2" X 4 1/2" X 10'0"	NO HOLES		75 lbs.
E-1	1 1/2" X 8" X 10'0"	NO HOLES		65 lbs.
M-2	2" X 9" X 10'0"	NO HOLES		100 lbs.
WHEEL CHOCKS & LOADING DOCK "SAFETY" ACCESSORIES				
WC-3	LAMINATED	***HEAVY-DUTY***		14 lbs.
	(8" x 8" x 8")			
WC-8	ALUMINUM			6.25 lbs.
	(11 5/8" x 8" x 7")			
WC-10	MOLDED - WITH "EYE" bolt			9 lbs.
	(6" X 8" X 10")			
WC-12	"ORANGE" URETHANE			6.5 lbs.
	(11 3/8 x 8 1/4 x 7 5/8")			
WCB-1 Bracket	CHOCK HOLDER / Steel ("BLACK")			8 lbs.
	(3" x 5" deep x 14" wide)			
Caution Sign	WHEEL CHOCK - SAFETY YELLOW			0.25 lbs.
	(10" X 14")			
WC-TAB	WHEEL CHOCK "TAB" / Steel ("BLACK")			0.5 lbs.
	(For mounting Chain to wall, supplied "loose").			
CHAIN	3/16" Proof-coil (Cut & Attached to chock)			.4 lbs./ft.
MOUNTING BOLTS (with Nuts & Washers)				
5/8" X 3 1/4"	HEX HEAD BOLT	*For **"Box"** application.		0.5 lb.
1/4" X 3 1/4"	WEDGE ANCHOR	*For "Chain" to wall/conc		0.25 lb.
5/8" X 4 1/4"	WEDGE ANCHOR	*For concrete.		0.5 lb.
5/8" X 6 1/4"	WEDGE ANCHOR	*For concrete.		0.75 lb.
3/4" X 4 1/4"	WEDGE ANCHOR	*For concrete.		0.75 lb.
3/4" X 6 1/4	WEDGE ANCHOR	*For concrete.		1 lb.
TRUCK & TRAILER BUMPERS / MOLDED RUBBER				
TB-10	3 1/4" X 2 7/8" X 6"	(2) HOLES		2 lbs.
TB-20	3 1/2" X 3 1/4" X 6"	(2) HOLES		2.5 lbs.
TB-60	2" X 2 1/2" X 7 7/8"	(2) HOLES		1.25 lbs.
TB-70	2" X 2 1/2" X 16"	(3) HOLES		2.75 lbs.
TB-90	3 1/2" X 5 1/4" X 8"	(4) HOLES		4.5 lbs.

Reliable Rubber Products, Inc.
2600 Yosemite Blvd. Ste. B - Modesto, CA 95354-4041
Toll Free 888-525-9750 Fax 209-521-7123
Website www.reliablerubber.com
E-mail sales@reliablerubber.com
office@reliablerubber.com

BUMPER BLOCK-OUTS

Bumper Block-outs can be used with all types of loading dock bumpers, to achieve a greater projection (out from dock face), when required.
Material: 1/4" thick, A36 Structural Steel (Diamond Plate top).
Painted "BLACK".

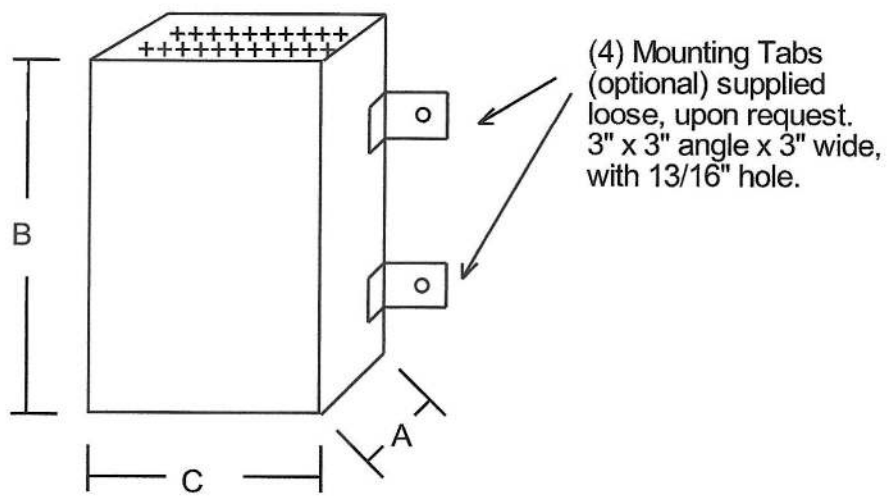

A = DEPTH
B = HEIGHT
C = WIDTH

(A)(B)(C)
Example: BBO-6-20-12
Please call, fax or E-mail your requirements for quotation.


Reliable Rubber Products, Inc.

2600 Yosemite Blvd. Ste. B - Modesto, CA 95354-4041
Toll Free 888-525-9750 Fax 209-521-7123
Website www.reliablerubber.com
E-mail sales@reliablerubber.com


ABOVE DOCK SUPPORT BRACKETS and/or PIT EXTENDERS

A.D.S.B's can be used for mounting all types of loading dock bumpers, above the dock floor, when required.
Material: 3/8" thick, A36 Steel Plate, with (2) 13/16" mounting holes. Color: "BLACK"

SIDE VIEW

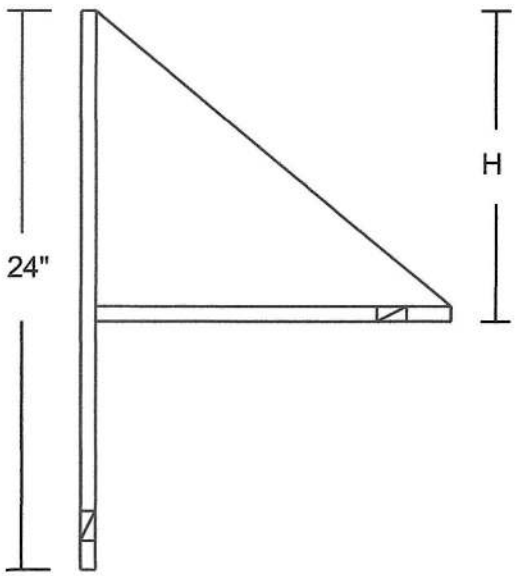

TOP VIEW

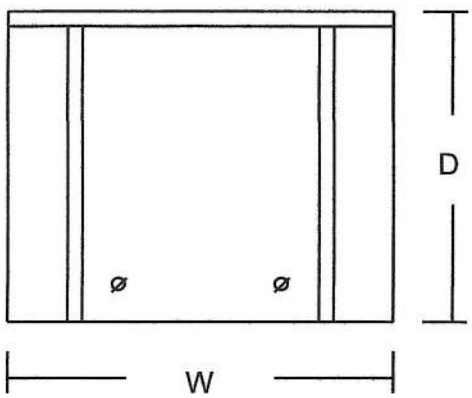

H = Height/above floor (2",3",4",5",6",8",10" & 12")
D = Depth (8")
W = Width (8" Standard, 10",12",14" & 16" avail.)

(H)(D)(W)

Example: ADSB-4-8-8


* Other sizes available upon request.

Reliable Rubber Products, Inc.
2600 Yosemite Blvd. Ste. B - Modesto, CA 95354
Toll Free 888-525-9750
Local 209-525-9750 Fax 209-521-7123
Website www.reliablerubber.com
E-mail sales@reliablerubber.com

CURB ANGLE / PIT STEEL

RRPI's "Curb Angle" can be used with all types of Dock Levelers, from all Manufacturers (provide drawing).

Material: 3" x 3" x 1/4" thick, A36 Structural Steel Angle, painted "BLACK". Concrete Anchors are 1/2" x 8" J-Bolts, welded in place, 3" from each end and 12" on center. (6) and (8) pc. sets are same price, please specify.

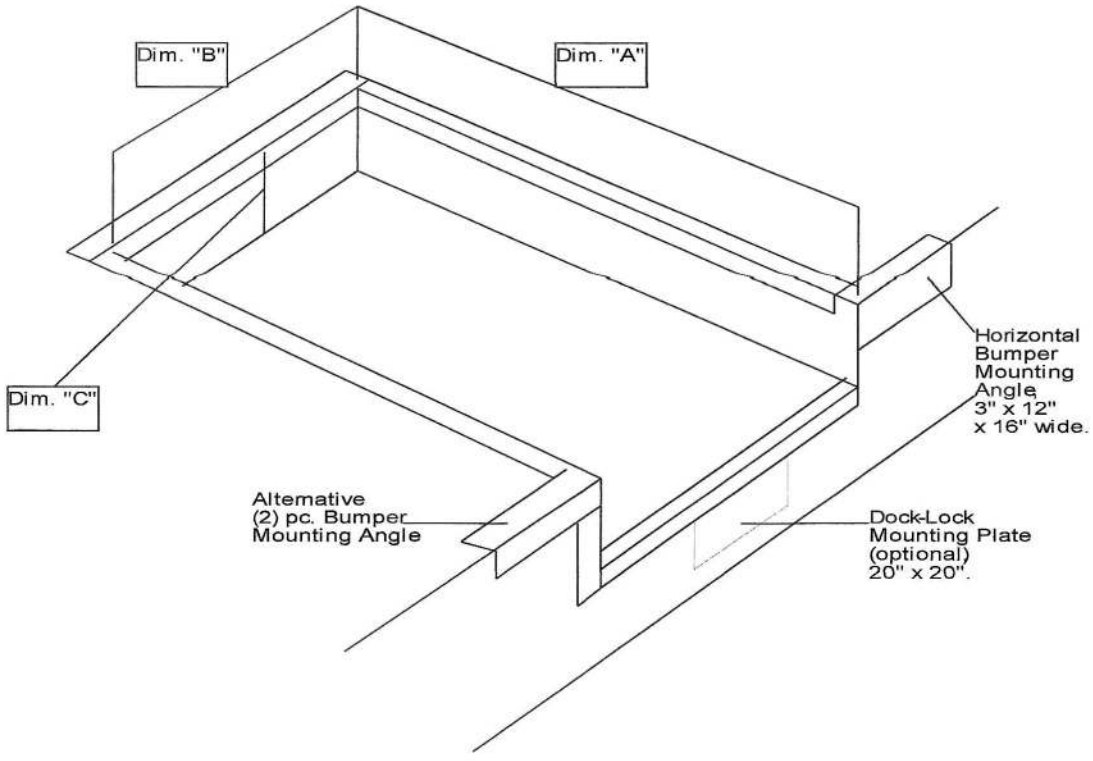

Please fax or email your drawing for quotation.

BUMPER BLOCK-OUTS	("boxes" with diamond plate top's, 1/4" thick)		
MODEL NUMBER	Dimensions (A x B x C) Proj. X Height X Width)		
BBO-12-12-13	12" X 12" X 13" **(for B-12)**	60 LBS.	each
BBO-12-13-10	12" X 13" X 10" **(for B-13)**	52 LBS.	each
BBO-2-12-12	2" X 12" X 12"	13 LBS.	each
BBO-3-12-12	3" X 12" X 12"	16 LBS.	each
BBO-4-12-12	4" X 12" X 12"	21 LBS.	each
BBO-5-12-12	5" X 12" X 12"	26 LBS.	each
BBO-6-12-12	6" X 12" X 12"	32 LBS.	each
BBO-8-12-12	8" X 12" X 12"	43 LBS.	each
BBO-10-12-12	10" X 12" X 12"	54 LBS.	each
BBO-12-12-12	12" X 12" X 12"	60 LBS.	each
*** OPTIONAL 20" X 12" FACE**		100 LBS.	each
*** OPTIONAL 24" X 12" FACE**		120 LBS.	each
*** ADD: TO WELD BUMPER TO BLOCK-OUT.**			
*** OTHER SIZES AVAILABLE, PLEASE CONTACT FOR QUOTE.**			
*** (4) MOUNTING TAB'S SUPPLIED "LOOSE", FOR BOLTING BLOCK-OUT TO DOCK (IF NECESSARY).**			

Above Dock Support Brackets/PIT EXTENDERS	(3/8" thick x full 24" face)		
MODEL NUMBER	Dimensions (H x D x W) Height X Depth X Width)		
ADSB-2-8-8	2" X 8" X 8"	35 LBS.	each
ADSB-3-8-8	3" X 8" X 8"	35 LBS.	each
ADSB-4-8-8	4" X 8" X 8"	35 LBS.	each
ADSB-5-8-8	5" X 8" X 8"	35 LBS.	each
ADSB-6-8-8	6" X 8" X 8"	35 LBS.	each
ADSB-8-8-8	8" X 8" X 8"	35 LBS.	each
ADSB-10-8-8	10" X 8" X 8"	35 LBS.	each
ADSB-12-8-8	12" X 8" X 8"	35 LBS.	each
*** OPTIONAL 10" WIDE**		44 LBS.	each
*** OPTIONAL 12" WIDE**		53 LBS.	each
*** OPTIONAL 14" WIDE**		62 LBS.	each
*** OPTIONAL 16" WIDE**		71 LBS.	each
*** ADD: TO WELD BUMPER TO BRACKET.**			
*** OTHER SIZES AVAILABLE, PLEASE CONTACT FOR QUOTE.**			

CURB ANGLE/PIT STEEL, 1/4" Thick	(for Dock Levelers, etc.)		
MODEL NUMBER	Dimensions (W x D) (Width x Depth)		
CA-6x6	6'0" x 6'0"	220 LBS.	set
CA-6x8	6'0" x 8'0"	227 LBS.	set
CA-6x10	6'0" x 10'0"	260 LBS.	set
CA-6'6x6	6'6" x 6'0	227 LBS.	set
CA-6'6x8	6'6" x 8'0"	234 LBS.	set
CA-6'6x10	6'6" x 10'0"	267 LBS.	set
CA-7x6	7'0" x 6'0"	234 LBS.	set
CA-7x8	7'0" x 8'0"	247 LBS.	set
CA-7x10	7'0" x 10'0"	274 LBS.	set
***(6) pc. and (8) pc. sets are same price, please specify. OTHER sizes available, please contact for Quote.**			

Reliable Rubber Products
815 " D " Street - Modesto, CA 95354-3401
Phone 1-888-525-9750 Fax 209-521-7123
Website www.reliablerubber.com
E-mail sales@reliablerubber.com

Trak-Protectors

A *Reliable* product that protects Overhead Door Tracks against Forklift damage !

Now there is a cost effective solution to protect your overhead door tracks from forklift and other material handling equipment damage.

The *Trak-Protector* is a heavy-duty product, designed to cover your roll-up door tracks, to ensure maximum protection.

By protecting your door tracks properly you will be cutting costs and increasing productivity by avoiding down time and costly repairs.


Trak-Protectors are constructed using 1/4" thick structural steel, fully welded to a 3/8" thick base plate, for added support. *Trak-Protectors* come with a safety yellow (Powder Coated) finish for high visibility and durability.

A brand new design has been implemented to ease your installation process. The base plate has been "pulled back" a 1/2" (at wall) to allow existing door control wiring to "pass through" without modifying the *Trak-Protector* or relocating wiring.

Trak-Protectors are available in pairs/sets (one left and one right) and come in 24", 36" and 48" heights to suit your needs.

Model # TP-24
Model # TP-36
Model # TP-48

LEFT SIDE VIEW

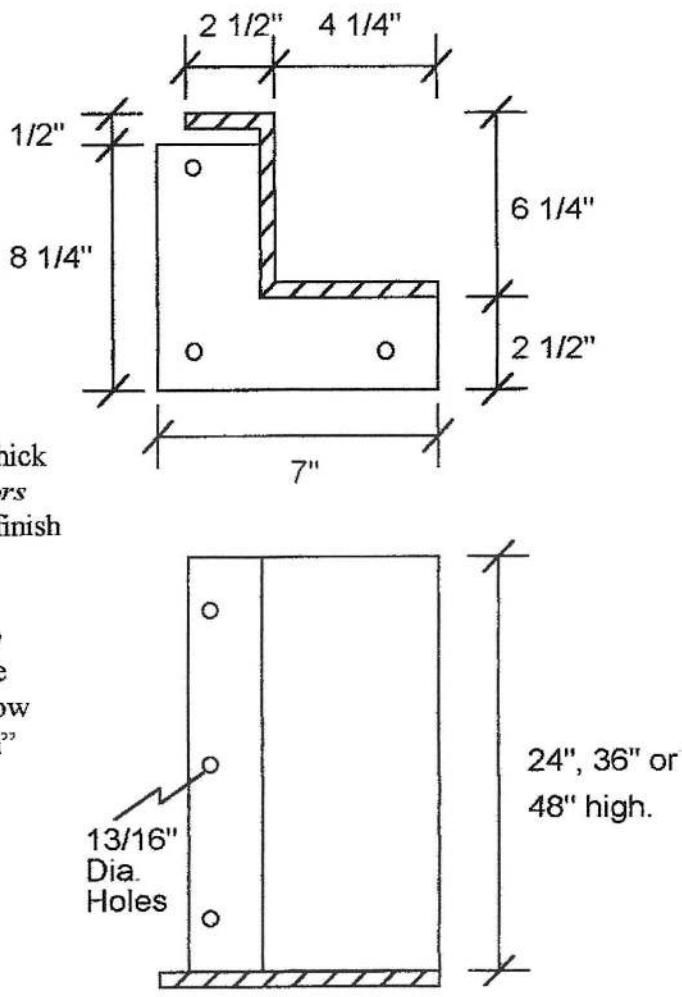


RELIABLE RUBBER PRODUCTS

815 D" Street, Modesto, CA 95354
(209) 525-9750
(209) 521-7123 fax
www.reliablerubber.com

Reliable Rubber Products manufactures sturdy steel impact protection products to help guard against untimely and costly repairs to your facility and/or machinery. Four different products are available which are powder coated with a safety yellow finish for high visibility and durability and are also available unfinished (unpainted metal). **Please call for pricing and availability.**

TRAK-PROTECTOR


Trak-Protectors are designed to protect overhead roll-up door frames and tracks from costly damage by forklifts and other material handling equipment.

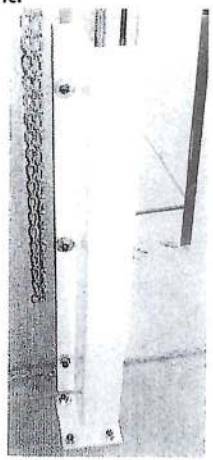

Constructed of 1/4" formed steel welded to a 3/8" base plate. 3 holes in the base and upright are 13/16 inch to allow for varied installation. Design allows existing door wiring to be used without modification. Sizes are 24, 36 and 48 inches tall.

BOLLARDS


Sturdy Bollards are constructed of ¼ inch steel pipe (4 or 6 inches in diameter) that is welded to a 3/8 inch thick, 10 inch square base plate.

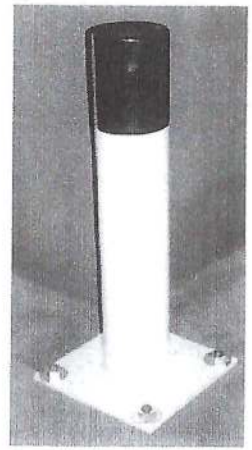

4 mounting holes are 13/16 inch. Black plastic cap is standard. Available sizes are 24, 36 or 48 inches tall.

CORNER GUARD


Protect racks and equipment with our Corner Guard. Guards are constructed of ¼ inch 4x4 structural steel welded to a 3/8 inch thick base.

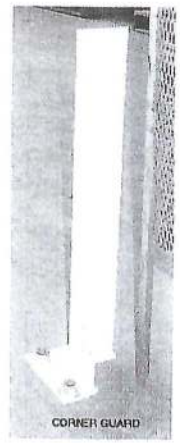

3 base plate mounting holes are 13/16 inch. Corner Guards are 24, 36 or 48 inches tall.

COLUMN PROTECTORS

Protect those center columns, supports, downspouts, etc. from forklift damage with Reliable's Column Protectors.

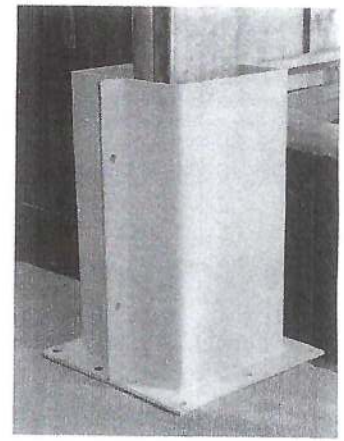

Two halves surround a 10 inch column or support. Constructed of ¼ inch formed steel welded to a 3/8 inch thick base plate. Available sizes are 24, 36 or 48 inches tall.

TRAK-PROTECTORS (Z-shaped/for roll-up doors)		"SAFETY YELLOW"		
MODEL NUMBER	"Z" - SHAPED (x Height)			
	* 1/4" Thick x 3/8" BASE-PLATES.			
TP-24	24" HIGH		50 LBS.	SET = Left and Right
TP-36	36" HIGH		72 LBS.	SET = Left and Right
TP-48	48" HIGH		98 LBS.	SET = Left and Right
* CUSTOM SIZES ALWAYS WELCOME. PLEASE SUPPLY DRAWING AND QUANTITY FOR PRICING.				
BOLLARDS (Round Pipe/Crash Posts)		**"SAFETY YELLOW"**		
MODEL NUMBER	DIMENSIONS (Diam. x Height)			
	* 1/4" Thick x 3/8" BASE-PLATES.			
BOL-4-24	4" x 24"		32 LBS.	each
BOL-4-36	4" x 36"		40 LBS.	each
BOL-4-48	4" x 48"		52 LBS.	each
BOL-6-24	6" x 24"		50 LBS.	each
BOL-6-36	6" x 36"		65 LBS.	each
BOL-6-48	6" x 48"		84 LBS.	each
* CUSTOM SIZES ALWAYS WELCOME. PLEASE SUPPLY DRAWING AND QUANITY FOR PRICING.				
STEEL CORNER GUARDS		**"SAFETY YELLOW"**		
MODEL NUMBER	DIMENSIONS 4" x 4" Angle x Height)			
	* 1/4" Thick x 3/8" BASE-PLATES.			
SCG-24	24"		18 LBS.	each
SCG-36	36"		28 LBS.	each
SCG-48	48"		32 LBS.	each
* CUSTOM SIZES ALWAYS WELCOME. PLEASE SUPPLY DRAWING AND QUANITY FOR PRICING.				

Please E-mail or Fax in your Quote requests, including any drawings, pictures, part #'s or dimensions.
DON'T FORGET TO INCLUDE QUANTITY & DESTINATION ZIP CODE FOR FREIGHT ESTIMATE.
All prices are F.O.B. Modesto, CA 95354  **and subject to change without notice.**
Custom sizes and other fabrication are always welcomed.
WARRANTY: Defects in workmanship & material for (1) year from time of shipment.
RETURNS: Written approval must be obtained prior to return. 20% restocking fee, plus freight.
This applies to stock items only, no custom or fabricated to order products.